

## INTRODUCTION

Aksa is committed to providing the most effective solution to the Data Center industry with the power it takes from engineering, production, distribution, and customer-oriented experience and knowledge. We are constantly improving designs, products and infrastructure to offer the highest level of reliability for Emergency Power Systems. While serving the industry in hundreds of countries Globally, we design our products and systems in line with the needs of Data Center practitioners at the center of our focus. Aksa generator group provides continuity, reliability and ideal performance for Data Centers.

### Power (kVA)

3 Phase, 60 Hz, PF 0.8

VOLTAGE	STANDBY RATING (ESP)		DCC RATING		DCC Amper
	kW	kVA	kW	kVA	
480/277	1000	1250	900	1125	1353.16

**Data Center Continuous (DCC)** The maximum power which a generating set is capable of delivering while supplying a variable or continuous electrical load and during unlimited run hours. Depending on the sites to supply and the availability of utility.

DCC:Data Center Continuous Power ratings, as defined, meet the Uptime Institute Tier III and IV requirements as detailed in the Uptime Institute Tier Standards:Topology. The power ratings of Standby and DCC data, given above have been identified according to conditions of 100kPa barometric pressure (110m. altitude), 25 C ambient temperature.

\*Data tolerance %+- 5.

### General Characteristics

Model Name	AUDC 1000-6
Frequency (Hz)	60
Fuel Type	Diesel
Engine Made and Model	CUMMINS QST30-G5 60Hz EPA Tier2
Alternator Made and Model	HCI 634 J - 60Hz
Control Panel Model	InteliGen NT
Emission Certification	U.S. EPA Tier 2

### ENGINE SPECIFICATIONS

Engine	CUMMINS
Engine Model	QST30-G5 60Hz EPA Tier2
Number of Cylinder (L)	12 cylinders - V type
Bore (mm.)	140
Stroke (mm.)	165
Displacement (lt.)	30.48



Aspiration	Turbocharged and Low Temperature Aftercooled
Compression Ratio	14.7:1
RPM (d/dk)	1800
Oil Capacity (Total With Filter) (lt)	154
Standby Power (kW/HP)	1112/1490
Prime Power	1007/1350
Block Heater QTY	2
Block Heater Power (Watt)	3000
Fuel Type	Diesel
Injection Type and System	Direct
Type of Fuel Pump	Bosch P8500 LLA
Governor System	ECM
Operating Voltage (Vdc)	24 Vdc
Battery and Capacity (Qty/Ah) / CCA	2x143/1800
Charge Alternator (A)	35
Cooling Method	Water Cooled
Cooling Fan Air Flow (m3/min)	1612.8
Coolant Capacity (engine only / with radiator) (lt)	79/202
Intake Air Flow (DCC) (liter/s)	1460
Air Filter	Dry Type
Fuel Cons. Prime With %100 Load (lt/hr)	248
Fuel Cons. Prime With %75 Load (lt/hr)	185
Fuel Cons. Prime With %50 Load (lt/hr)	126

#### ALTERNATOR CHARACTERISTICS


Manufacturer	Stamford
Alternator Made and Model	HCI 634 J - 60Hz
Frequency (Hz)	60
Power (kVA)	1300
VOLTAGE (V)	480
Phase	3
A.V.R.	MX341
Voltage Regulation	(+/-)1%
Insulation System	H
Protection	IP23
Rated Power Factor	0.8
WEIGHT COMP. GENERATOR (Kg)	2279
COOLING AIR (m³/min)	96,84

#### Open Gen.Set Dimensions (mm)

LENGTH	4400
WIDTH	1780



HEIGHT	2350
DRY WEIGHT (kg.)	6770
TANK CAPACITY (lt.)	1500

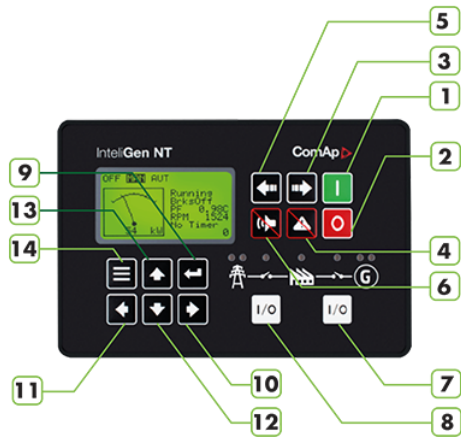

- 1.Start
- 2.Stop
- 3.Mode > OFF > MAN > AUT > TEST
- 4.Fault Reset
- 5.Mode < OFF < MAN < AUT < TEST
- 6.Horn Reset
- 7.GCB control (Open/Close)
- 8.MCB control (Open/Close)
- 9.Enter
- 10.5% Increase of edited setpoint's value.
- 11.5% decrease of edited setpoint's value.
- 12.Decrease setpoint value.
- 13.Increase setpoint value.
- 14.Escape.

## Devices

IntelGen NT Auto Mains Failure control module Static battery charger Emergency stop push button and fuses for control circuits

## CONSTRUCTION and FINISH

- Comonents installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

## INSTALLATION

Control panel is mounted generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

## GENERATING SET CONTROL UNIT

- 195Vac to 264Vac input volt-age range
- 45Hz to 440Hz input supply frequency range
- Capability to work direct from 240Vdc to 365Vdc sup-ply voltage
- 27.6Vdc factory set DC out-put terminal voltage (option up to 29.4Vdc)
- 5.0Adc continuous output current into load
- Capability to work continu-ously into short-circuit
- Parallel connection for higher output current rating and redundant operation
- Series connection capability for higher output voltage requirements
- No cooling fans used for high operational reliability
- Aluminum alloy case for ro-bust handling and easy mounting



### STANDARD SPECIFICATIONS

Comprehensive gen-set controller for both single and multiple gensets Parallel operation up to 32 gen-sets operating in standby or paralleling modes

To be used in conjunction with detachable colour displays IntelliVision 5 or IntelliVision 8

Support of engines with ECU (Electronic Control Unit)

Complete integrated gen-set solution and signal sharing via CAN bus – minimum external components needed

Many communication options – easy remote supervising and servicing

Load sharing and VAR sharing via CAN Virtual shared inputs and outputs via CAN Support of wide range of applications

Single or multiple gen-sets in parallel to mains operation with automatic back up function, multiple island operation

Advanced power management function

Customizable load control in parallel to mains

Wide range of ECU support

Highly configurable

Timers, Internal PLC, Force values and more

Active e-mail messaging and SMS with optional communication module

Stop, Manual, Automatic, Test, Start, Silent / Lamp test,

Automatic synchronization and power control AMF function, Baseload, Import / Export, Peak shaving, Voltage and PF control (AVR)

True RMS (TRMS) is used with Voltage, Current and Power measurement

### Instruments

#### ENGINE

Engine Speed

Oil Pressure

Water Temperature

Engine Running Hours

Battery Voltage

Maintenance Plan

#### GENERATOR

Voltage (L-L, L-N)

Current (L1-L2-L3)

Frequency

Earth leakage

kW

Power Factor

kVAr

kWh, kVAh, kVArh

#### MAINS

Voltage (L-L, L-N)

Frequency

**PROTECTION CIRCUITS**

Charge failure  
Low Battery Voltage  
Stop Failure  
Low Fuel Level (ops) Overload  
kW

Reverse phase sequence PRE-

**ALARMS**

Low Oil Pressure  
High engine temperature  
Low Engine Temperature Low /  
High engine speed  
Low / High generator frequency  
Low / High generator voltage  
ECU warning

**STOP ALARMS**

Start failure  
Emergency stop  
Low oil pressure  
High engine temperature  
Low water level  
Low / High engine speed  
Low / High generator frequency  
Low / High generator voltage Oil  
pressure sensor open circuit  
Phase direction

**Options**

High oil temperature - Shutdown  
Low fuel level - Shutdown  
Low fuel level - Alarm  
High fuel level - Alarm  
Customizable load control in parallel with the network  
Wide range of ECU support  
Highly configurable  
Timers, Internal PLC, Force values and more are compatible with ComAp's IntelliVision displays  
Active e-mail messaging and SMS with communication module

**Standards**

EN 60068-2-6 ed.2:2008

EN 60068-2-30, May 2000

EN 61010-1:2003

EN 60068-2-27 ed.2:2010

EN 60068-2-64

VDE AR N 4105:2011; DIN VDE V 0124-100:2012 (CI. 5.3.3, 5.3.4, 5.3.6, 5.4.3, 5.4.5, 5.4.6, 5.5)

BDEW Medium-Voltage Guideline: 2008; FGW TR3:2013 (Clauses 4.2.2, 4.2.3, 4.2.4, 4.3.2, 4.3.3, 4.3.4., 4.5, 4.6., 4.7)

**STATIC BATTERY CHARGER**

EBC 2405M is designed and opti-mized for charging all types of Lead Acid batteries (including jell type sealed Lead Acid batteries), protecting the battery and extend-ing its useful life time

EBC 2405M can deliver continuous charging current of 5A into 24V battery system (voltage is set to 27.6Vdc, with an option of up to 29.4Vdc) These battery chargers are designed with performance in mind and special care is taken for protecting and extending the life-time of the battery.

EBC 2405M is designed with "Switched Mode" technology, where the switching transistor has only two states, ON or OFF, which increases the overall efficiency, hence reduces the excess heat dissipation and in return, increasing the device life-time and reliability.

The control system is also designed in such a way that; battery is charged in three stages:

Constant current mode (protecting battery cells)

Constant voltage mode (reducing the charge current)

Float charge (compensation of internal self-discharge)

Constant current mode makes sure that; when the battery is drained down below its rated capacity, the high charge current flow into the battery is limited in order to protect the cells and reduce damage to the plates.

As the battery capacity is recovered, each cell voltage reaches up to 2.30Vdc to 2.45Vdc level, which means that the required charging current starts to reduce.

When the required battery terminal voltage is fully reached, the charger keeps supplying just enough current in order to compensate for the internal self-discharge (float charge). This ensures that the battery can maintain its high charge state and deliver its rated out-put current, when ever required.

**STANDARD SPECIFICATIONS**

- Water cooled diesel engine
- Radiator and mechanical fan
- Protective cage to prevent rotating and touching hot parts
- Output breaker
- Electric starter and charge alternator
- Battery (lead acid), cables and stand
- Automatic synchronization and power control system (multiple parallel generator)
- Circulation pump (for engine block heater)
- Engine block water heater
- Steel chassis and anti-vibration wedges
- Fuel tank separate from the group (Açıkset group)
- Flexible fuel connection hoses



- Alternator with single bearing and H insulation class
- Industrial capacity muffler and flexible steel compensator
- Electronic battery charger
- Operating and installation instructions

## OPTIONAL EQUIPMENTS

### ENGINE

- Remote radiator cooling
- Fuel-water separator filter
- Oil heater

### ALTERNATOR

- Anti-condensation heater,
- Bigger Power rate alternator

### CONTROL PANEL

- Continuous parallel system with the network
- Network synchronization system
- Remote communication and control
- Remote alarm panel
- Alarm output relays
- Earth leakage, single generator

- Charging ammeter

### TRANSFER BOARD

- Three or four-pole ATS system
- Three or four-pole motorized output breaker

### AUXILIARY EQUIPMENT

- Main Fuel Tank
- Automatic or manual fuel filling system
- Oil drain, electric pump
- Low and high fuel level alarm
- Exhaust muffler, critical type
- Enclosure cabinet; soundproof type or open area type
- Tool kit (for maintenance)
- Maintenance kit for 1500/3000 working hours
- Antifreeze and engine lubricating oil (for -30 ° C ambient temperature)

## AKSA CERTIFICATES

- ISO 14001-2004
- TS ISO 8528
- TS ISO 9001-2008
- CE
- SZUTEST
- 2000/14/EC

Manufacturer reserves the right to make change in the model, technical specifications, color, equipment, accessories and images without prior notice. (24.05.2021)